
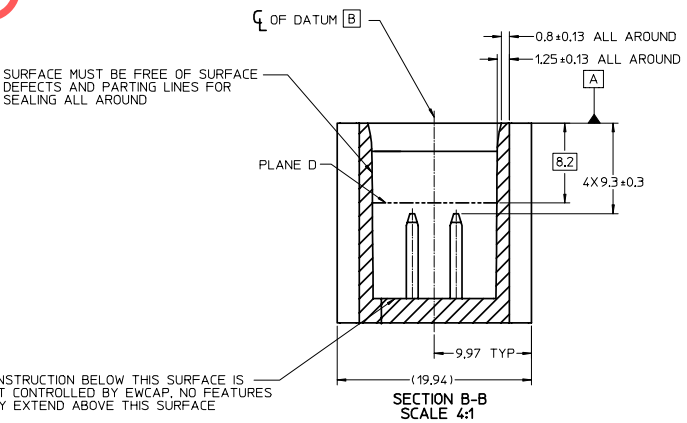
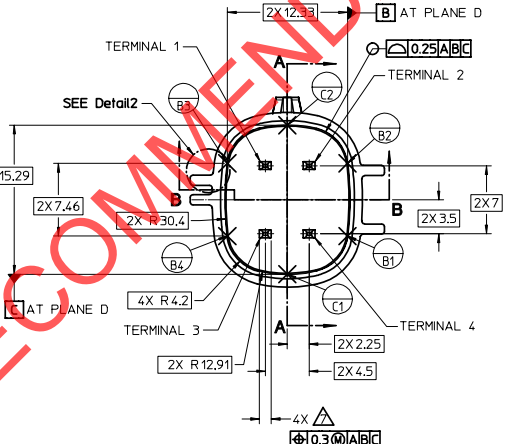



VIEWS SHOWING THE MINIMUM CLEARANCE
DIMENSIONS IF RECESSED INTO A POCKET



UNLESS OTHERWISE SPECIFIED:


1. ALL DIMENSIONS SHOWN IN MILLIMETERS.
2. DIMENSIONING & TOLERANCING PER ASME Y14.5M-1994
3. RADIi ON ALL CORNERS SHOWN SHARP OR UNSPECIFIED MAY BE BROKEN TO R 0.25
4. STANDARD COLORS FOR POLARIZATION (SEE CHART) DEVIATION REQUIRES APPROVAL OF AUTHORIZED PERSON.
5. A FULL SHROUD ON THE MATING CONNECTOR IS REQUIRED TO INSURE THAT THE CONNECTOR-HEADER POLARIZATION FEATURES WILL FUNCTION. IT ALSO PREVENTS SCOOP DAMAGE TO THE HEADER PINS. REFER TO SAE/USCAR-12 FOR ADDITIONAL INFORMATION.
6. DRAFT ON OUTSIDE SURFACES IS PERMISSIBLE WITHIN ALLOWABLE TOLERANCE.

 FOR BLADE GEOMETRIC AND PLATING REQUIREMENTS
REFER TO EWCAP DWG NO. EWCAP-001, DETAIL 150-1001

150-S-004-2-D03	D	GREEN
150-S-004-2-C03	C	BROWN
150-S-004-2-B03	B	GREY
150-S-004-2-A03	A	BLACK
EWCAP P/N	OPTION	MATING CONN COLOR

Not recommended for new applications



	A	INITIAL RELEASE	10-28-04	DL	RB
	LET	REVISION RECORD	DATE	DWN	CHK
	TOLERANCES (UNLESS OTHERWISE SPECIFIED)				
	DIMENSIONS ARE IN mm				
	ANGLES ±3°				
	LINEAR ±0.2				
			THIRD ANGLE PROJECTION 		
SHEET	SCALE	DRAWN BY	CHECKED BY	DATE	
1 OF 1	4:1	J.LANGOLF	J.CHILDS	07-01-04	
TITLE	DIRECT CONNECT INTERFACE 4 WAY (2X2) 1.5mm SEALED MALE				
SHEET	DRAWING NUMBER	SIZE	DO NOT SCALE DRAWING COMPUTER AIDED DRAWING		REVISION LEVEL
	150-S-004-Z03	E			A