




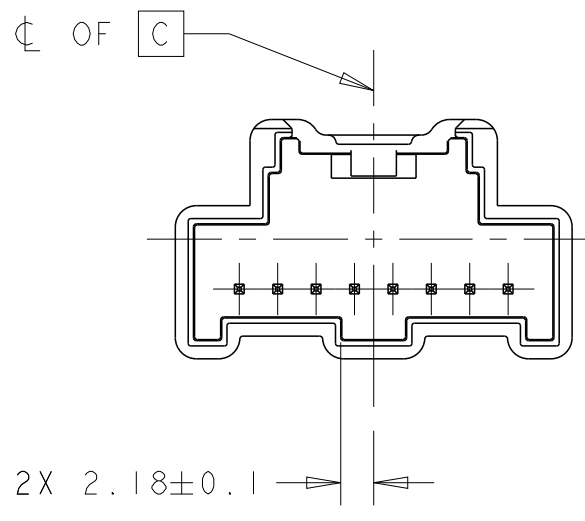


KEYING OPTION "B"

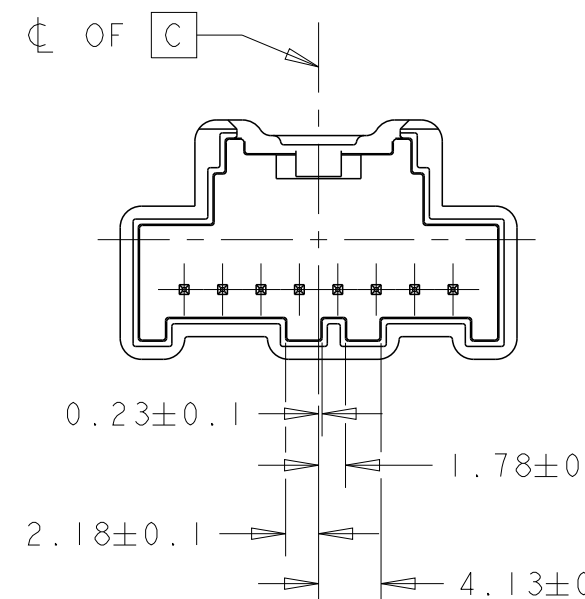

KEYING OPTION "D"

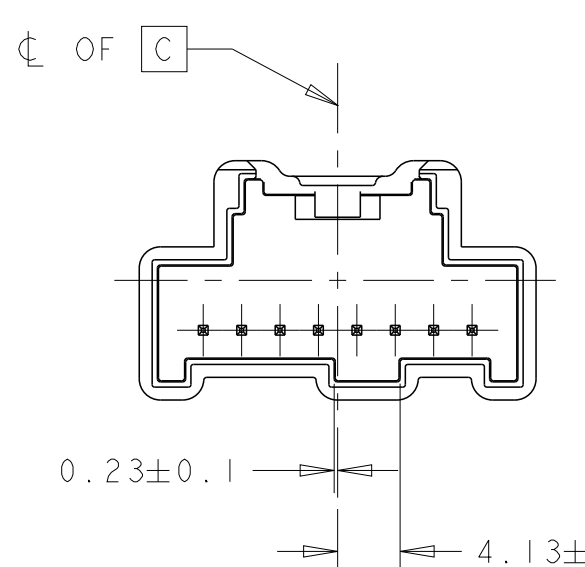

KEYING OPTION "F"



REQUIRED FEMALE CONNECTOR CLEARANCE AREA

(24.98)
MAXIMUM FEMALE CONNECTOR WIDTH

(5)
FI
AT BOTTOM SURFACE

(3)
FI
AT BOTTOM SURFACE

REQUIRED FEMALE CONNECTOR CLEARANCE AREA

(5)
FI
AT BOTTOM SURFACE



-

EI

(EIO)

F I C

FI

EWCAP EXPRESSLY PROHIBITS ANY PARTY FROM CHANGING EITHER ANY
EWCAP CONTROLLED PORTION OF THIS DRAWING OR ANY ASSOCIATED
TOOLING BEFORE RECEIVING APPROVAL, SIGNED BY THE AUTHORIZED
REPRESENTATIVES, OF THE USCAR MEMBER COMPANIES. REFERENCE TO
THE SIGNED CHANGE NOTICE MUST BE ENTERED IN THE DRAWING CONTROL
COLUMN.

E9

USCAR-EW CAP

TITLE	1 X 8 UNSEALED INTERDEACE
-------	---------------------------

1 X 8 UNSHIELDED INTERFACE
0.64mm CONNECTORS

SHEET 1 OF 2	DRAWING NUMBER 064-U-008-1-Z02	SIZE A2	DO NOT SCALE DRAWING COMPUTER AIDED DRAWING	REVISION LEVEL H
-----------------	-----------------------------------	------------	--	------------------------



064-U-008-I-A02	A	BLACK
064-U-008-I-B02	B	GRAY
064-U-008-I-C02	C	BROWN
064-U-008-I-D02	D	GREEN
064-U-008-I-E02	E	DARK BLUE
064-U-008-I-F02	F	NATURAL/WHITE
EWCAP P/N	POLARITY	MATING CONNECTOR COLOR 

